




FRENCH OAK COLLECTION

Inspired by Fine French Woods



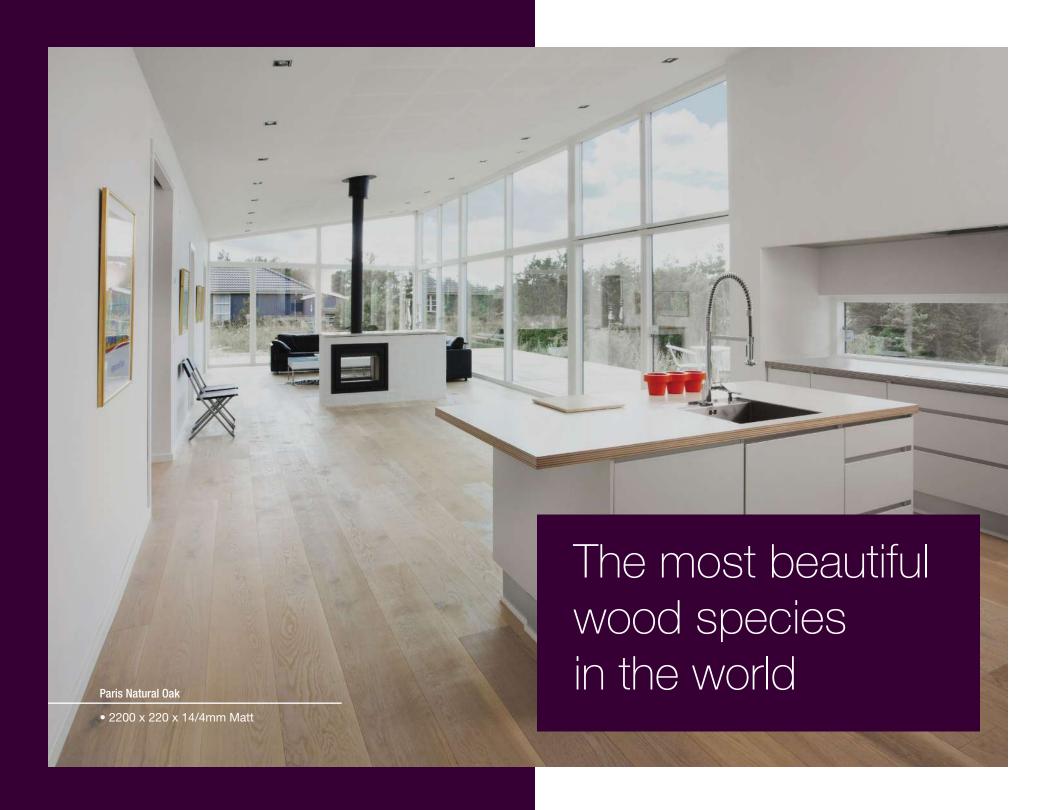


Swish Oak flooring

We are proud to present one of the most beautiful wood species in the world. French Oak hardwood is known for having high tannin levels that make the wood age better.

This gives French Oak more beautiful patina and a classic time-worn look. It has been used in French wine making for hundreds of years and now you can make beautiful floors from this exquisite wood.

Swish French Oak flooring is the best with this wood coming from the French neighbour picked from the best woods in Alpine forests.

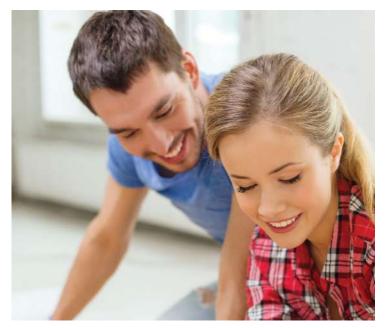





Why Choose Swish French Oak

Swish flooring uses only the best character grade wood. Every piece has unique beauty presented by cracks, knots and tight wood grain that make unique patterns on each board. Your floor will look like a beautifully made mosaic. Our style is inspired after having travelled in every city in France taking in every colour and pattern is inspired by the culture of each city and region.

What you get with Swish Wide Board French Oak Flooring















- Extra wide boards at 2200 x 220 x 14/4mm.
- Easy to install with the use of Valinge G5 click locking systems.
- European design colours in 10 stunning styles.
- Best for beautiful interior design.
- Unique board colour variation. Swish French Oak changes colour and tone over time as it ages and is exposed to different seasonal changes. This variation is different from tree to tree. Colour variation gives contrast in light and dark tones.
- Unique variety in making custom floors reflecting your lifestyle.
- The latest trends in Australian home interior design Classic look from the invisible lacquer which gives a simple, pale finish to the boards.
- An environmentally friendly, Swish Oak flooring uses as half as many tress as solid Oak floors.
- Matching accessories.







Swish Oak Wide board

Swish Oak Flooring range comprises of multidirectional constructed engineered boards that provide all the benefits of being structurally robust. This assembly increases the boards' resistance to expansion and contraction from changes in humidity and temperature reducing warping or cupping. Hence these engineered boards are superior to solid Oak flooring in both durability and stability.

Technical specifications:

• Type: Engineered Oak Floating Floor

• Thickness: 14/4mm

Width: 220mmLength: 2200mm

• Surface Finish: 9 layers UV coatings Matt

• Edging: Micro-Bevelled Edge

• Profile: Valinge 5G lock

• Installation Method: Floating, glueless on top

of underlay

Pack Size: 2.905m2Pack Weight: 25 kgBoards Per Pack: 6

• VOC Rating: E0

Swish Oak Wide board



Swish Oak Flooring is a beautifully crafted range of timeless French Oak. The signature palette of colours, natural grain characteristics, and finishes have been prudently designed capturing timeless elegance, the essence of Oak flooring



Swish Oak Contemporary

Technical specifications:

• Type: Engineered Oak Floor

• Thickness: 14/2mm

• Width: 190mm

• Length: 1900mm

• Surface Finish: 9 layers

UV coatings Matt

• Edging: Micro-Bevelled Edge

• Profile: Tongue & Groove

• Installation Method: Floating


or Glue down

• Pack Size: 2.90m2

• Pack Weight: 22 kg

• Boards Per Pack: 8



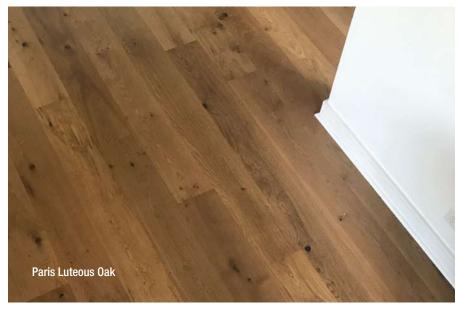

Swish Oak Contemporary



Swish Oak Flooring is a beautifully crafted range of timeless French Oak. The signature palette of colours, natural grain characteristics, and finishes have been prudently designed capturing timeless elegance, the essence of Oak flooring







Swish Oak Natura

Technical specifications:

• Type: Engineered Oak Floor

• Thickness: 14/3mm

• Width: 190mm

• Length: 1900mm

• Surface Finish: 9 layers

UV Lacquer Matt

• Edging: Micro-Bevelled Edge

Profile: Tongue & Groove / Valinge 5g Click
Installation Method: Glue down / Floating

• Grade: ABCD

• Pack Size: 2.90m2

• Pack Weight: 23 kg

• Boards Per Pack: 8

• VOC Rating: E1 <5ppm

Swish Oak Natura



Swish Oak Flooring is a beautifully crafted range of timeless French Oak. The signature palette of colours, natural grain characteristics, and finishes have been prudently designed capturing timeless elegance, the essence of Oak flooring.





Technical specifications:


- Type: Engineered Oak Floor
- Thickness: 14/3mm
- Width: 148mm
- Length: 888mm
- Surface Finish: 9 layers
 - **UV Lacquer Matt**
- Edging: Micro-Bevelled Edge

- Profile: Tongue & Groove
- Installation Method: Glue down
- Grade: ABCD
- Pack Size: 1.0514m2
- Pack Weight: 7 kg
- Boards Per Pack: 8
- VOC Rating: E1 <5ppm






Swish Oak Natura Herringbone

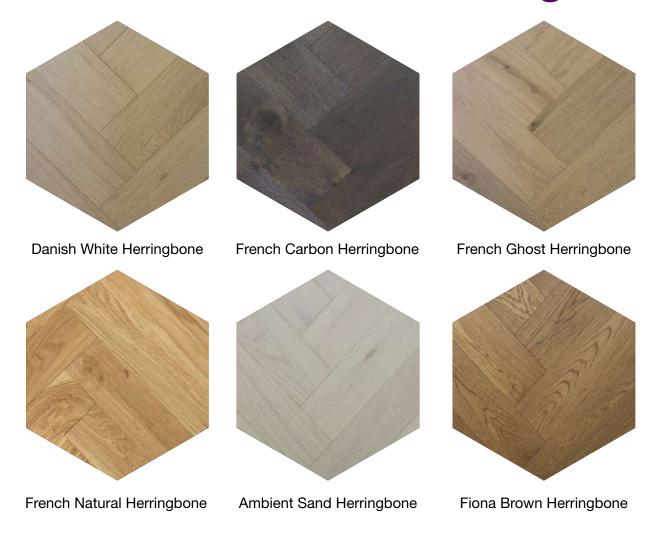

Swish Oak Flooring is a beautifully crafted range of timeless French Oak. The signature palette of colours, natural grain characteristics, and finishes have been prudently designed capturing timeless elegance, the essence of Oak flooring.

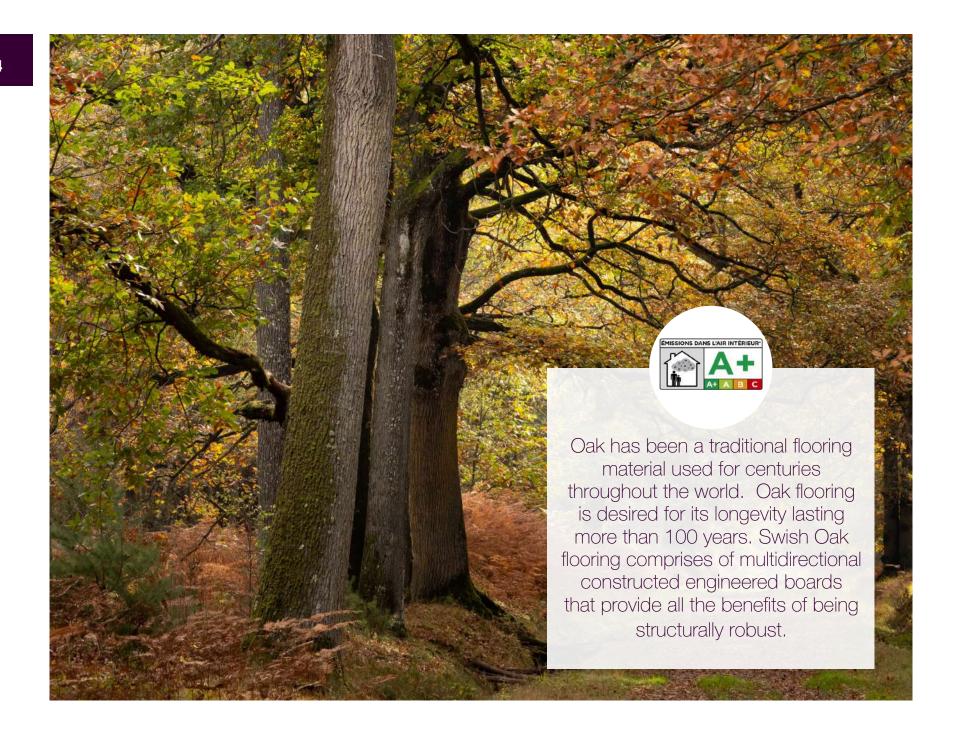

Swish Oak

Warranty Conditions

Eco Flooring Systems Pty Limited guarantees Swish Oak flooring against manufacturing defects at time of purchase and guarantees structural integrity and wear for a period of 25 years for residential.

This Warranty applies to the repair or replacement of Swish Oak proven defective through faulty materials or manufacture.

This Warranty is provided on the basis that:

Swish Oak boards with obvious defects at the time of installation are not installed. Eco Flooring Systems will not be responsible for any costs related to the installation of defective, damaged product.

Swish Oak boards are laid in accordance with the Swish Oak flooring Installation Instructions and adhesive manufacturer's application instructions.

The floor is laid internally and is not subject to excessive moisture.

The Swish Oak flooring is in its original manufactured state.

All preventative maintenance and care operations are maintained.

Swish Oak comes with guarantees that cannot be excluded under the Australian Consumer law. You are entitled to a replacement or refund for a major failure.

Swish Oak floors are made from natural product and may contain variations in characteristics, colour, tone and grain. Any exposure to excessive heat, dryness or moisture may cause damage to the natural product. Buyer acknowledges that over time a colour change may occur in the product especially when exposed to direct sunlight and the product may experience some separation or gaps caused by temperature changes or moisture variation, which is not considered a defect.

Sub floor heating: Due to Eco flooring has no control over the temperature settings in the floor heating systems, we cannot offer product warranty.

Surface checking(fine surface splits), gloss variation between boards, colour variation between boards etc are considered a natural part of timber flooring and are therefore excluded from this warranty.

Due to the variable climate conditions within Australia, planks may display sight bow and twist once removed from carton this is not considered as structural defect unless the planks cannot be assembled. Slight convex bowing of the boards, up to 1% of the length is acceptable and should not affect the laying process.

This Warranty does not cover damage or defects resulting from or in any way attributable to:

- Improper storage, handling or installation of the flooring (including improper installation of joists and sub flooring or improper surface preparation); Failure to follow all specific installation instructions voids this warranty;
- Abuse, lack of maintenance, neglect, abnormal use or misuse, negligence, application
 of solvents, corrosives or other chemicals to the flooring, colour change, fading or
 damage due to exposure to the sun, crazing, excessive pivot and point-loads, spikeheeled shoes, unpadded furniture feet, water, damage from sand, pebbles or other
 abrasives or other unintended uses;
- Insect infestation after shipment from the point of origin;
- · Stains and finishes:
- Alterations of original manufactured product;
- Moisture problems (including subfloor moisture, leaks, rain, wet mopping, etc.) or excessive dryness or heat; Gapping, cupping or crowning due to moisture ingress/ egress will not be warranted;
- Settlement or movement of the structure to which the flooring is attached;
- Natural events such as hurricanes, tornadoes, earthquakes, and floods;
- Variations in colour, grain and markings that exist in the flooring when new or that develop over time because of varying exposure to sunlight or UV light;
- Installation of flooring with visible defects;
- Installation over radiant floor heating;
- Extreme conditions where the humidity level is not within a 40-60% range throughout the year using air conditioners, humidifiers or dehumidifiers. Dramatic variations in humidity may cause micro checking of the finish which is not considered a defect therefore not covered under this warranty;

This Warranty extends to the buyer and to the owner of the first structure in which the flooring is installed during the Warranty Period and may not be assigned or transferred.